TECHNICAL DATA SHEET



CARRF

CARRE THERMOSTATIC SURFACE MOUNTED SHOWER VALVE WITH DIVERTER & FAST FIX CONNECTIONS

Product Specification

Product Code: CR SHXDIVFF C
Finish: Chrome
Product Type: Contemporary

Construction: Body is of brass construction **Cartridge Type:** Thermostatic cartridge


Supply: Suitable for all plumbing systems,

preferably balanced

Inlet Connection: 15mm compression

Outlet Connection: G ½"

Water Pressure: Min 0.5bar, Max. 5.0bar
Dimensions for Fitting: 150mm inlet centres

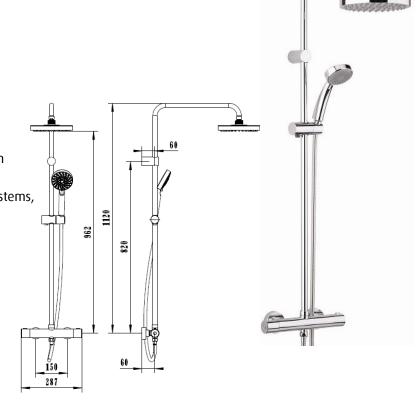

Additional Information

- Dual control flow and temperature are controlled separately, giving accurate control of both.
- Thermostatic cartridge maintains showering temperature to +/- 1°C by compensating for changes in the incoming water temperature and pressure giving the stable outlet temperature.
- Automatic shut off in the event of hot or cold water supply failure, thus reducing the risk of scalding.
- Factory set to a maximum of 38°C to eliminate the ability to select an unsafe temperature this can be manually over-ridden up to 46°C to suit user preference.
- Supplied with 1.5m hose, single function handset and 200mm rose, both with rub clean nozzles.
- Utilises unique fast fit system WMNT10 C
- Chrome plated to BSN 248.

Technical Advice: For further information please call 0844 7016273 or email customercare@bristan.com

Guarantee: 5 years covering manufacturing faults.

Flow Rates (litres per minute)

System Pressure	0.6 bar	0.8 bar	1 bar	2 bar	3 bar	5 bar
Through shower rose	6.5	7.5	8.6	12.4	15.2	19.7
Through handset	6.2	7.3	8.2	11.9	14.9	19.6

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG Telephone: 0844 701 6274 Facsimile: 0844 701 6275 Web Site: www.bristan.com Email: enquire@bristan.com





